



Technical data

Voltage	U	120	V
Phase		1	~
Frequency		60	Hz
Speed		1560	RPM
Power consumption	P _e	410	W
Nominal current	I	3.4	A
Maximum current	I	3.9	A
Capacitor		20/250	μF
Ambient temperature	T _{amb min/max}	-13...104	°F
Insulation Class		CL.F	
IP Class		IP55	
Weight		34.0	Lbs.
Packing dimensions		25.0x25.0x14.2	inch



Please note: Picture may deviate from original product

Fan details

Impeller blades	6
Impeller type	3
Impeller system	C
Impeller material	PP

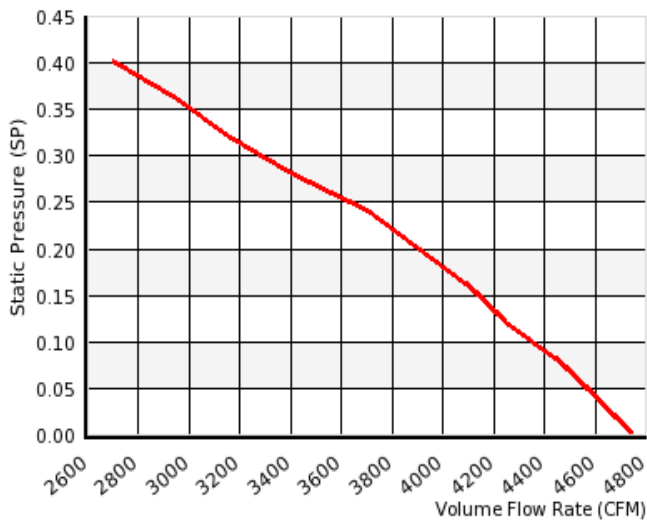
Control options

Triac controller	Yes
Transformer	Yes
Frequency drive	No
Intelligent Fan Drive	No

* All control options including single phase control frequency are available. Please contact Vostermans Ventilation Sales for more information

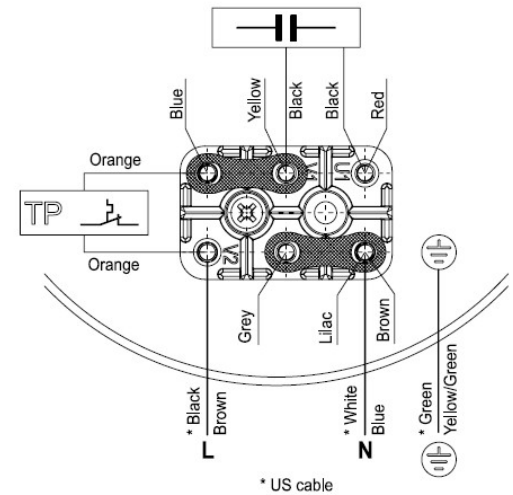
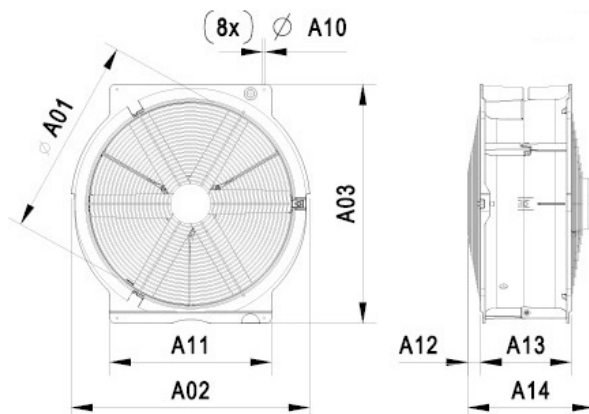
Characteristics

0.00 in. wg	4750 CFM
0.20 in. wg	3900 CFM


Approval(s)

Wiring diagram

AA10 - CW


Dimensions


A01	20.4 inch
A02	24.4 inch
A03	24.4 inch
A10	0.3 inch
A11	16.5 inch
A12	1.3 inch
A13	9.3 inch
A14	12.9 inch